POWER YOUR FUTURE

Cummins Generator LG120C

QSB6.7-G3

Prime Power: 120KW/150KVA

Standby Power: 132KW/165KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series

25KVA--2000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG120C
Rated prime power	kva	150
Rated standard power	kva	165
Rated voltage line to line	V	400/230
Rated current	Α	217
Maximun sound level	dB(@7m)	96

Engine-DCEC Cummins	S	
Model		QSB6.7-G3
Aspiration	Turbo charged, air to air cooled	
Fuel system	common rail system of Bosch	
No. cylinders		6 in line
Displacement	Liquid	5.9
Bore*Stroke	mm	102*120
Compression ratio		17.3: 1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	151
Governor type		Electronic speed
Start Motor	V	24

Exhause System		
Exhause gas flow	m³/min	363
Exhause gas temp	${\mathbb C}$	485
Max back pressure	kPa	10

Aspiration System		
Max inlet pressure	kPa	100
Combustion volume	m³/min	/
Air flow	m³/min	150

L/h	38.0
L/h	31.0
L/h	22.0
L	380
	L/h

Lubrication System		
Oil capacity	L	19.5
Oil consumption	g/kwh	0.5
Oil pressure	kPa	69
(continuous operation)		

Cooling System		
Coolant capacity	L	9.4
Thermostat operation range	$^{\circ}\mathbb{C}$	82-95
Max water temperature	$^{\circ}\!\mathbb{C}$	110

Alternator		
Model	LONGKAI	LK274F/S
	STAMFORD	UCI274F
Phase		3
Voltage	V	400/230
Wiring Type	3 Phas	se 4 wire, Y type
Bearing		1
Power factor		8.0
Frequency	Hz	50
Prime power	KW	120
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG120C

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options






- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet




Standard Features

Engine(DCEC Cummins)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Unit Dimensions(Basic unit)

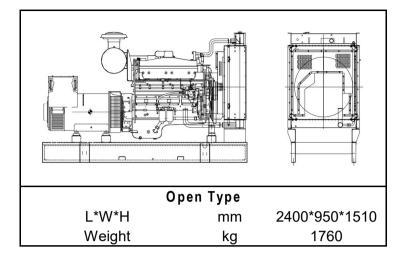

Options Battery charge \bigcirc Engine heater \bigcirc Alternator heater 0 **PMG** \bigcirc Water oil separator \bigcirc Daily fuel tank \bigcirc Remote control panel \bigcirc Automatic transfer switch/ATS \bigcirc Switch box Standard: • Options:0

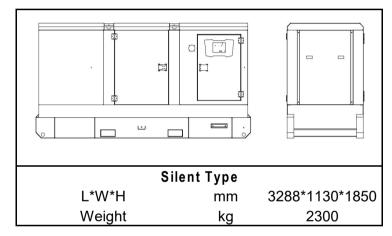

Warranty*

Cummins Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

