# POWER YOUR FUTURE

# Cummins Generator LG310C

# 6ZTAA13-G3

Prime Power: 310KW/387.5KVA

Standby Power: 341KW/426.3KVA



## GENERATING POWER SOLUTIONS

#### Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

#### **Increased uptime during operations**

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

#### Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

#### Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

#### **Premium resale value**

Designed and built to last.



- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series 25KVA--2000KVA



# FUAN LONGKAI POWER CO.,LTD.

#### **Headquarters:**

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



## **Technical Data**

Model		LG310C
Rated prime power	kva	387.5
Rated standard power	kva	426.3
Rated voltage line to line	V	400/230
Rated current	Α	559
Maximun sound level	dB(@7m)	≤100

Engine-DCEC Cummins			
Мо	del		6ZTAA13-G3
As	piration	Turbo, Water/Air cooling	
Fu	el system	North oil PD pump /GAC	
No	. cylinders		6 in line
Dis	placement	Liquid	13
Во	re*Stroke	mm	130*163
Co	mpression ratio		17:01
Ra	ted speed	r/min	1500
Ra	ted net power(with fan)	Kw	340
Go	vernor type		Electronic speed
Sta	art Motor	V	24

Exhause System		
Exhause gas flow	kg/min	31.2
Exhause gas temp	${}^{\mathbb{C}}$	594
Max back pressure	kPa	12

Aspiration System			
Max inlet pressure	kPa	235	
Combustion volume	kPa	/	
Air flow	kg/min	28.1	

Fuel System		
100% load(Prime power)	L/h	74.7
75% load(Prime power)	L/h	55.2
50% load(Prime power)	L/h	37.2
Fuel tank capacity	L	780

Lubrication System		
Oil capacity	L	45.42
Oil consumption	g/kwh	0.5
Oil pressure	kPa	82.7
(continuous operation)		

Cooling System		
Coolant capacity	L	23.1
Thermostat operation range	$^{\circ}\!\mathbb{C}$	82-94
Max water temperature	$^{\circ}\mathbb{C}$	102

Alternator		
Model	LONGKAI	LK444F
	STAMFORD HO	01444F-S4L1D-F41/S4L1S-F4
Phase		3
Voltage	V	400/230
Wiring Type	3 Pha	se 4 wire, Y type
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	320
Exciter Type	Brushles	s, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG310C

#### **Controller-DEEPSEA**

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



# Control Module Options





- Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet



# Standard Features Engine(CCEC Cummins

Engine(CCEC Cummins)

Radiator 50°C max,fans are driven by bel

24V charge alternator

Alternator: single bearing alternator IP23,
insulation class H/H

Standard auto control system

One set of air filter, fuel filter, oil filter

Main line circuit breaker/MCCB


Base fuel tank


Two 24V batteries, rac and cable

Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler

User manual

# **Unit Dimensions(Basic unit)**

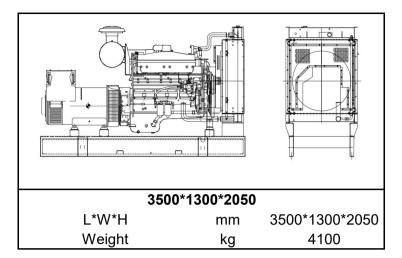

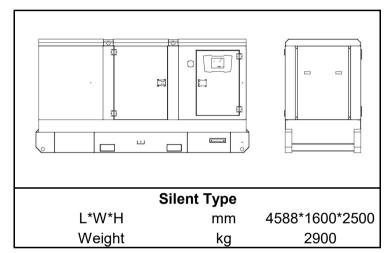

## **Options**

Battery charge 0 Engine heater  $\bigcirc$ Alternator heater  $\bigcirc$ **PMG**  $\bigcirc$ Water oil separator  $\bigcirc$ Daily fuel tank  $\bigcirc$ Remote control panel  $\bigcirc$ Automatic transfer switch/ATS  $\bigcirc$ Switch box Standard: • Options:0

### Warranty\*

#### **Cummins Engine**

12 months from date of purchase and 1000 hours.

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.