POWER YOUR FUTURE

Cummins Generator LG460C

KTA19-G8

Prime Power: 520KW/650KVA

Standby Power: 572KW/715KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

↑SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

Cummins Series
25KVA--2000KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG460C
Rated prime power	kva	650
Rated standard power	kva	715
Rated voltage line to line	V	400/230
Rated current	Α	938.08
Maximun sound level	dB(@7m)	≤100

Engine-DCEC Cummi	ns	
Model		KTA19-G8
Aspiration	e, 6 cylinde	er diesel engine
Fuel system		PT type
No. cylinders		6 in line
Displacement	Liquid	19
Bore*Stroke	mm	159*159
Compression ratio		13.9:1
Rated speed	r/min	1500
Max power(with fan)	Kw	575
Governor type		EFC Electrical
Start Motor	V	24

L/s	
$^{\circ}\mathbb{C}$	
kPa	10
	$^{\sim}$ C

Fuel System		
100% load(Prime power)	L/h	132
75% load(Prime power)	L/h	125
50% load(Prime power)	L/h	118
Fuel tank capacity	L	950

Lubrication System		
Oil capacity	L	50
Oil consumption	g/kwh	≤4
Oil pressure	kPa	345-483
(continuous operation)		

Cooling System		
Coolant capacity	L	23
Thermostat operation range	$^{\circ}\! \mathbb{C}$	82-94
Max water temperature	$^{\circ}$ C	104

Alternator		
Model	LONGKAI	LK544E
	STAMFORD	HCI544E-S5L1D-E4/S5L1S-E4
Phase		3
Voltage	V	400/230
Wiring Type	3 Pha	ase 4 wire, Y type
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	488
Exciter Type	Brushle	ss, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

LG460C

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- ■Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet

Fuan Longkai Power Co., Ltd. | Web: www.longkaipower.com



Standard Features Engine(CCEC Cummins) Radiator 50°C max,fans are driven by bel 24V charge alternator Alternator: single bearing alternator IP23, insulation class H/H Standard auto control system One set of air filter, fuel filter, oil filter Main line circuit breaker/MCCB Base fuel tank Two 24V batteries, rac and cable

Exhaust system(Ripple flex exhaust pipe,

exhaust siphon, flange, muffler

Options Battery charge 0 Engine heater \bigcirc Alternator heater \bigcirc **PMG** \bigcirc Water oil separator \bigcirc Daily fuel tank \bigcirc Remote control panel \bigcirc Automatic transfer switch/ATS \bigcirc Switch box Standard: • Options:0

Warranty*

User manual


Cummins Engine


12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

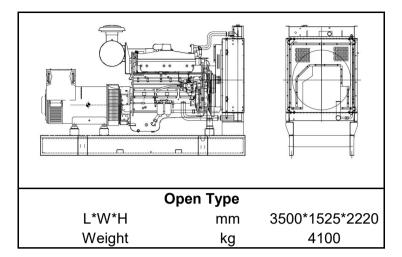

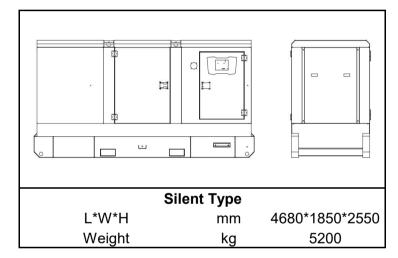



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.